


KOOK 80

Wood Insertion Cookers



Nominal power	kW	7,5
Reduced power	kW	-
Introduced thermal power (max)	kW	9,5
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	82,5
Reduced efficiency	%	-
Heating volume (min-max)	m ³	180
Nominal CO at 13% O ₂	%	0,07
Reduced CO at 13% O ₂	%	-
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	916
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	29
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	95
Dust content at 13% O ₂ (min-max)	mg/Nm ³	27
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	-
Combustible		Legna
Hourly consumption (min-max)	kg/h	2,2
Autonomy (min-max)	h	-
Ignition electrical absorption (max)	W	-
Operating electrical absorption (max)	W	50
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	12
Exhaust diameter	mm	140
Combustion air inlet diameter	mm	-
Mass of smoke (min-max)	g/sec	6,9
Exhaust fumes temperature (max)	°C	264
Net weight	kg	138,2
Gross weight	kg	153,8
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	-
Ducting capability up to	m	-

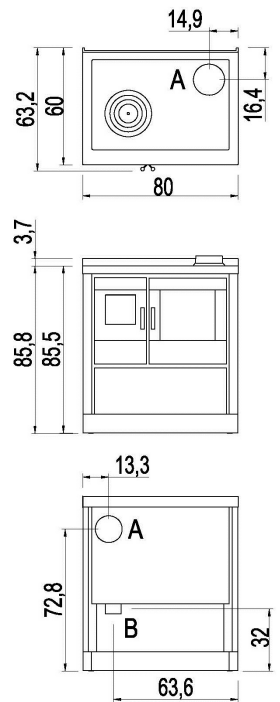

Art. 15A B-VG 2015
BImSchV 2016
Regensburg
München
Stuttgart
Aachen



MATCH

71150030	NEUTRAL STRUCTURE with cast iron Top	EAN 8033123617178
71150031	NEUTRAL STRUCTURE with cast iron Top with ventilation + light kit	EAN 8033123617185
71150060	NEUTRAL STRUCTURE with glass-ceramic Top	EAN 8033123617239
71150061	NEUTRAL STRUCTURE with glass-ceramic Top with ventilation + light kit	EAN 8033123617246
6915036	Stainless steel	EAN 8033123616829
6915035	Anthracite steel	EAN 8033123616812
6915051	White steel	EAN 8033123617116
6915034	Black steel	EAN 8033123616805

OPTIONAL

5013003	Top	EAN 8033123613361
---------	-----	-------------------

PLUS



Cooking



Central Top and back exhaust



Refractory stone inner with 2nd combustion air



OPTIONAL Ventilation + light kit




View on the oven



Built-in


STOVE PACKING



L (cm)	H (cm)	P (cm)
97	102,1	79


VOLUME (m ³)
0,78

LINING PACKING



L (cm)	H (cm)	P (cm)	
steel	60	13,5	80

STOCKING



TRANSPORT

